

SPH515S

Product Family	Dishwasher
Subfamily	Hoodtype dishwasher
Series	Topline
Basket dimensions	500x500 mm
Default power supply	400 V 3N~ / 16 A / 9,7 kW / 50 Hz
Simultaneous heating	Yes
Width	635 mm
Depth	750 mm
Height	1510 mm
Maximum height with hood open	2102 mm
Usable load height	470 mm



Target

Potential users	Bars/Cafes; Hotels; Restaurants/Catering; Butcher's shops; Schools; QSR
-----------------	--

Aesthetics

Control Panel	Electronic	Led colour	White
---------------	------------	------------	-------

Functions



Functions	GN 1/1 trays washing; Triple filter; HTR; Door clearance 470mm
-----------	--

Programmes

Programs

Boiler 71°C/Tank 60°C-1'20"	Boiler 85°C/Tank 60°C-1'10"	Boiler 85°C/Tank 60°C-2'
Boiler 85°C/Tank 60°C-3'	Boiler 71°C/Tank 60°C-2'10"	Boiler 85°C/Tank 60°C-4'10"
Drain and self cleaning cycle	Yes	
Maximum baskets/hour	51	

Maximum plates/hour 918

Interface

Panel	Easyline 2016	Low rinse aid alert	Yes
Display	8 digit	Low detergent alert	Yes
Number of buttons	5	Cycle progress indicator	Yes
On/off indicator	Yes	End of cycle indicator	Yes
Salt light indicator	Yes	Manual diagnostics	Yes

Construction

Tank	Deep drawn	Wash tank capacity	14 l
Tank construction	Double skinned	Boiler capacity	8 l
Tank material	Stainless steel AISI 304	Noise level	Lpa 59.9 dBA
Back panel	Galvanised	Protection class	IPX4
Tank filter	Stainless steel	Net weight (kg)	125.000 kg
Wash arm	Stainless steel AISI 304	Adjustable feet	95 mm
Rinse arm	Stainless steel AISI 304	Drain max. height	1000 mm

Consumption and connections

Tank heating element	2200 W	Water consumption per cycle	3,2 l
Boiler heating element	9000 W	Warm water connection	Cold 15°C
Wash pump	700 W	Inlet water maximum temperature	60°C
Default connection	9700 W	Max water hardness	54°FH - 30°dH
Electrical connection options	230 V 3~ / 28 A / 9,7 kW / 50 Hz; 230 V~ / 16 A / 3,7 kW / 50 Hz (NC); 230 V~ / 29 A / 6,7 kW / 50 Hz	Water inlet pressure	1-6 bar / 100-600 kPa

Electrical Connection

Plug Not present

Manuals and Certifications

Certificate CE, UKCA


Equipment

Peristaltic detergent pump	Yes, electronic control	Drain pump with 3 stage filter system	Yes
Detergent (red) hose length	Yes, manual	Rinse pump with H.T.R. system	Rinse pump with atmospheric boiler
		Break tank	Yes

Integral continuous water softener	Yes	Partial water exchange in the wash tank via built-in drain pump	Yes
Peristaltic rinse aid pump	Yes, electronic control	Water supply pipe diameter	16 mm
Detergent flow rate	1.5 l/h	Drain supply pipe diameter	21.5 mm
Rinse aid (blue) hose length	Yes, manual	Automatic start	Yes
Rinse aid flow rate	0.4 l/h	Chemical level probe	Yes, optional KITSONLIV
Boiler thermostop	Yes	1/1GN tray washing option	Yes
Chemical dosing	gr/lt		

Accessories Included

Plate basket	PB50D01	Water supply pipe	Yes - 2m
Cutlery basket	PHOOS02	Drain pipe	Yes - 2m
Flat basket	PB50G02		

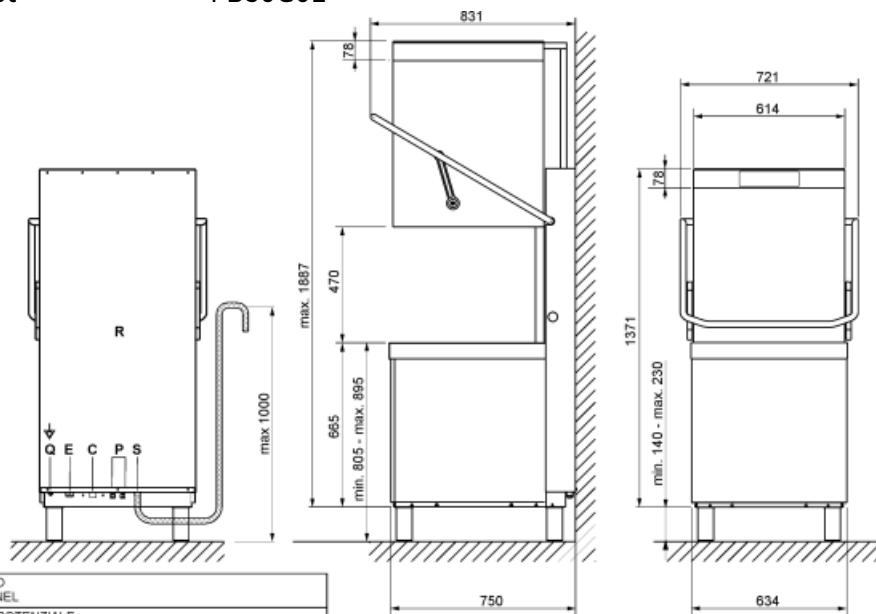

R	PANNELLO RETRO LOWER BACK PANEL
Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
S	TUBO DI SCARICO DRAIN HOSE
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
C	TUBO DI CARICO FILLER HOSE

Not included accessories



WT51200SHR

Entry table right side 1200mm



WT51200SHL

Entry table left side 1200mm



PHOOS01

Single basket in polypropylene for cutlery



PHOOS02

Basket in polypropylene for cutlery with 6 compartments



WH00S01

Wire insert for 12 small dishes



WH00C01

Wire insert for cups



PB50D01

Basket made of polypropylene for 18 plates 500x500



PHOOS03

Basket in polypropylene with 6 compartments for cutlery for Capote



WB50G01

Universal wire basket with flat bottom 500x500



WB50D01

Wire basket for 18 dishes and trays 500x500



WB50G03

Wire basket for glasses with inclined bottom 500x500



WB50G04

Wire basket for glasses with inclined bottom 500x500



WB50G02

Wire basket for glasses with inclined bottom 500x500



KITSONLIV

Probe level kit



WT51200SR

Entry table right side 1200mm



WT51200SL

Entry table left side 1200mm



WT5700SR

Entry table right side 700mm



WT5700SL

Entry table left side 700mm



WTX51200R
Exit table right side 1200mm



WTX51200L
Exit table left side 1200mm



WTX51200
Exit table both sides 1200mm




WTX5700R
Exit table right side 700mm




WTX5700L
Exit table left side 700mm



WTX5700
Exit table both sides 700mm



PB50G02
Universal basket in polypropylene
500x500



WB50T02
Wire basket for 5 trays 600x500

WG4646
Grid for light objects, 460x460 mm

Symbols glossary



Suitable for 1/1GN trays



HTR rinsing system



Triple filter

